

Quadro^{2xi}

THE GLOBAL PHONE NETWORK IN A BOX



Quadro2xi: The IP PBX with 1 ISDN Port, 2 FXS Ports and 16 IP Phones

The Quadro2xi is a fully-featured IP PBX for home offices and teleworkers as the Quadro2x is. The important difference is that Quadro2xi offers you one ISDN line instead of FXO and connects you via two B-channels of 64 kbit/s each to the digital PSTN. A 10Base-T Ethernet line provides access to the Internet. The Quadro2xi allows attaching two FXS phones and 8 fully-featured LAN IP phones. The 8 User Expansion increases the total number of LAN IP phones to 16. Additional virtual extension allow e.g., registering at various SIP servers.

In addition, all extensions assigned to a line may be mirrored and act as remote IP extensions. Wherever you are, calls will reach you, and you will be able to make calls as if you were in your office.

Fully-Featured IP PBX


The Quadro2xi offers the same multitude of features as the Quadro2x: extensive PBX functionality, integrated voicemail, cost saving call routing functionality, IP routing, SIP call signaling and much more.

Integrated Internet Access Router

The Quadro2xi IP PBX embodies a fully-fledged Internet access router with firewall security, including NAT, policy and service based filtering. An extensive IPSec VPN functionality with DES, 3DES and AES encryption makes an additional contribution to data security.

VoIP Carriers

The Quadro2xi IP PBX is easily applicable for VoIP Carriers as well as small businesses. For VoIP carriers, a special wizard has been implemented that facilitates the configuration of Quadro2xi to work according to individual requirements.

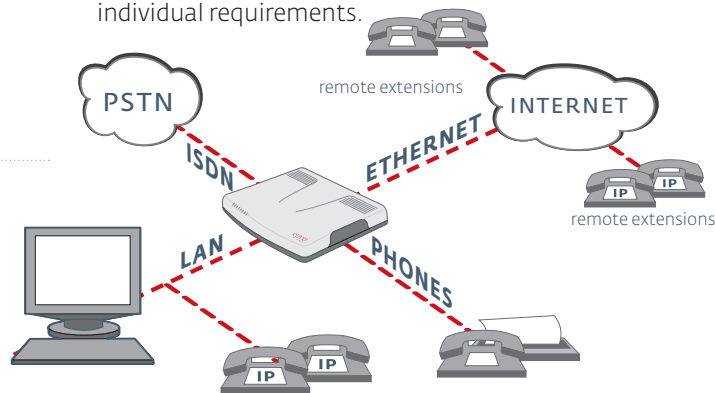

Telephony

Voice Features

Voice Coding G.711, G.723 (5.3, 6.3 kbit/s), G.726 (16, 24, 32, 40 Kbps), G.729A, iLBC (13, 33 kbit/s, 15, 2 kbit/s); (ITU-T: G.711, G.723.1 Annex A, G.726, G.729 Annex A; RFC 3951; iLBC; IETF: ITU-T Q.23, Q.24, Bellcore GR-506, GR-181; ITU-T G.168-2000, 2002; ETS_300659_1,2,3) NAT traversal (both manually and STUN) VAD, CNG, G.168 echo cancellation

Bandwidth Requirements

Per call WAN bandwidth requirements for the following codecs (non-encrypted/VPN encrypted):

G.711a/G.711u	20 msec	84 kbps/105 kbps
G.726-16	20 msec	37 kbps/59 kbps
G.726-24	20 msec	45 kbps/65 kbps
G.726-32	20 msec	52 kbps/74 kbps
G.726-40	20 msec	60 kbps/80 kbps
G.729a	20 msec	29 kbps/49 kbps
G.723	30 msec	21 kbps/34 kbps
iLBC	30 msec	27 kbps/41 kbps

PBX Features

Call blocking, Forwarding, Holding, Transferring
Call relay, Call waiting, Caller ID Detection
Voice mail
Call park, Pickup, Paging, Intercom
Multilevel auto attendant with Interactive Voice Response (IVR) and VoiceXMLv2 support
Voice mail with SMS notification
Distinctive ringing
Speed dialing
Many extension ringing
Receptionist
Call hunting, Hiding Caller ID
Automated Call back from Auto Attendant
Hold music
Call statistics
Do Not Disturb service
Unified messaging
3-way conferencing
Hotline service
T.38 fax, fax relay and clear channel fax
Unified Fax Messaging
Busy auto-redial
Directory assistance
Dial plans (call routing)
Time of day dialing
Call Queue

Call Signaling

SIP on the WAN and LAN side (RFCs: 3261, 3263, 3265, 3311, 3323, 3324, 3325, 3428, 3515, 3578, 3581, 3725, 3891, 3892, 3842, 3856, 3863, 4028, 4235)
SDP (RFC 2327)
RTP (RFCs: 1889, 1890, 2833, 3389, 3550, 3551, 3555, draft-ietf-avt-rfc2833bis-05, draft-ietf-avt-rtsp-ilbc-05),
in band and out of band signaling support
RTP Proxy
Fax over IP (ITU-T: T4, T30, T38, V17, V21, V27ter, V29)

POTS Signaling

Loop start
FSK and DTMF Caller ID support

ISDN Signaling

ITU-T: Q.921, Q.931, Q.951; ETSI ETS300 102;
NTT INS64 for Japan

Connectivity

Extensions

Up to 70 extensions including FXS phones LAN IP
Phones remote and virtual extensions
All extensions can be registered on several SIP servers

LAN IP Phones

8 SIP phones by default
8 additional SIP phones may be added with a feature key
Remote IP extensions may be enabled for all SIP phones

System Capacity

10 simultaneous VoIP calls with external parties
Unlimited station to station calling for IP phones
Unlimited station to station calling for analog phones
2 simultaneous ISDN calls with external parties
Up to 4 simultaneous calls through a VPN

Premise Connections

2 short-loop FXS ports (RJ11)
1 Ethernet 10/100BASE-T port (RJ45)

Uplink Connection

1 ISDN port to the Central Office (RJ45)
1 Ethernet 10BASE-T (RJ45)
(Other Quadro IP PBX models offer also FXO, ADSL or G.SDSL uplink connectivity. Please refer to the corresponding Technical Data Sheets.)

Billing

Radius Client (RFCs: 2865, 2866)

Internet

STUN/NAT traversal (RFC 3489)
IPSec VPN with DES, 3DES and AES encryption in tunnel mode (RFCs: 2402, 2406, 2409). Manual and automatic IKE key support
PPTP VPN
L2TP VPN
Firewall security via:
NAT (Network Address Translation)
IDS
Policy and service-based filtering
Stateful inspection firewall
DHCP server on the LAN side
DHCP client on the WAN side
DNS server with forwarding functionality
SNTP (Simple Network Time Protocol) server/client for computer clock synchronization
PPPoE connection to the ISP with PAP/(MS)CHAP authentication
IP DIFFSERV for QoS
Mail client to send voice messages as e-mail attachments (.wav) and system notifications
DNS (DYNDNS) support with third party
Port forwarding
Port translation

System

Management

Multilingual WEB interface accessible from LAN and WAN (HTTP/HTTPS), the WAN management access can be switched off
Password control
Remote diagnostics and software upgrade
Auto-provisioning
VoIP Carrier Wizard
Download/restore configuration
Legible and editable configuration files
Auto-configuration of IP phones via TFTP
SNMP Monitoring
Third Party Call Control XML RPC is available to order
Reset button with factory reset option
Custom Language Pack
Outlook Feature

Diagnostics/Testing

LEDs: Busy, Info, Fault, LAN, WAN, Line 1, Line 2
IP Call Quality Rating
Remote testing and VoIP diagnostics
Power-up diagnostics
Loop-back testing

Environmental

Physical Dimensions

Desktop devices, wall-mountable:
Measurements: 7.41" x 6.24" x 1.77"
(19 x 16 x 4.5 cm)
Weight: 13 ounces (360 g)

Conditions

41°F - 104°F (5°C - 40°C) operating temperature
41°F - 140°F (5°C - 60°C) storage temperature
5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
Output 12.0 VDC; 1.5 A

Regulatory Compliance

Safety: EN 60950;
EMC: FCC Part 15 Class B;
EN55022 Class B, EN55024; EN 60950;
Telecom: TBR3 (ISDN);

